



The Commonwealth of Massachusetts
Board of Building Regulations and Standards
Massachusetts State Building Code, 780 CMR

Building Permit Application To Construct, Repair, Renovate Or Demolish a *One- or Two-Family Dwelling*

SWIMMING POOLS

FOR MUNICIPALITY USE
Revised Mar 2011

This Section For Official Use Only

Building Permit Number: _____ Date Applied: _____

Building Official (Print Name) _____ Signature _____ Date _____

SECTION 1: SITE INFORMATION

1.1 Property Address: _____
1.2 Assessors Map & Parcel Numbers
Map Number _____ Parcel Number _____
1.3 Zoning Information: _____
Zoning District _____ Proposed Use _____
1.4 Property Dimensions:
Lot Area (sq ft) _____ Frontage (ft) _____

1.5 Building Setbacks (ft)

Front Yard		Side Yards		Rear Yard	
Required	Provided	Required	Provided	Required	Provided

1.6 Water Supply: (M.G.L.c. 40, § 54)
Public Private
1.7 Flood Zone Information:
Zone: _____ Outside Flood Zone?
Check if yes
1.8 Sewage Disposal System:
Municipal On site disposal system

SECTION 2: PROPERTY OWNERSHIP¹

2.1 Owner¹ of Record:

Name (Print) _____ City, State, ZIP _____
No. and Street _____ Telephone _____ Email Address _____

SECTION 3: DESCRIPTION OF PROPOSED WORK² (check all that apply)

New Construction Existing Building Owner-Occupied Repairs(s) Alteration(s) Addition
Demolition Accessory Bldg. Number of Units _____ Other Specify: _____

Brief Description of Proposed Work²: _____

SECTION 4: ESTIMATED CONSTRUCTION COSTS

Item	Estimated Costs: (Labor and Materials)	Official Use Only
1. Building	\$ _____	1. Building Permit Fee: \$ _____ Indicate how fee is determined: <input type="checkbox"/> Standard City/Town Application Fee <input type="checkbox"/> Total Project Cost ³ (Item 6) x multiplier _____ x _____ 2. Other Fees: \$ _____ List: _____ Total All Fees: \$ _____ Check No. _____ Check Amount: _____ Cash Amount: _____ <input type="checkbox"/> Paid in Full <input type="checkbox"/> Outstanding Balance Due: _____
2. Electrical	\$ _____	
3. Plumbing	\$ _____	
4. Mechanical (HVAC)	\$ _____	
5. Mechanical (Fire Suppression)	\$ _____	
6. Total Project Cost:	\$ _____	

SECTION 5: CONSTRUCTION SERVICES

5.1 Construction Supervisor License (CSL)

Name of CSL Holder _____

No. and Street _____

City/Town, State, ZIP _____

Telephone _____ Email address _____

License Number _____ Expiration Date _____

List CSL Type (see below) _____

Type	Description
U	Unrestricted (Buildings up to 35,000 cu. ft.)
R	Restricted 1&2 Family Dwelling
M	Masonry
RC	Roofing Covering
WS	Window and Siding
SF	Solid Fuel Burning Appliances
I	Insulation
D	Demolition

5.2 Registered Home Improvement Contractor (HIC)

HIC Company Name or HIC Registrant Name _____

No. and Street _____

City/Town, State, ZIP _____ Telephone _____

HIC Registration Number _____ Expiration Date _____

Email address _____

SECTION 6: WORKERS' COMPENSATION INSURANCE AFFIDAVIT (M.G.L. c. 152. § 25C(6))

Workers Compensation Insurance affidavit must be completed and submitted with this application. Failure to provide this affidavit will result in the denial of the Issuance of the building permit.

Signed Affidavit Attached? Yes No

SECTION 7a: OWNER AUTHORIZATION TO BE COMPLETED WHEN OWNER'S AGENT OR CONTRACTOR APPLIES FOR BUILDING PERMIT

I, as Owner of the subject property, hereby authorize _____
to act on my behalf, in all matters relative to work authorized by this building permit application.

Print Owner's Name (Electronic Signature) _____ Date _____

SECTION 7b: OWNER¹ OR AUTHORIZED AGENT DECLARATION

By entering my name below, I hereby attest under the pains and penalties of perjury that all of the information contained in this application is true and accurate to the best of my knowledge and understanding.

Print Owner's or Authorized Agent's Name (Electronic Signature) _____ Date _____

NOTES:

1. An Owner who obtains a building permit to do his/her own work, or an owner who hires an unregistered contractor (not registered in the Home Improvement Contractor (HIC) Program), will **not** have access to the arbitration program or guaranty fund under M.G.L. c. 142A. Other important information on the HIC Program can be found at www.mass.gov/oca Information on the Construction Supervisor License can be found at www.mass.gov/dps

2. When substantial work is planned, provide the information below:
 Total floor area (sq. ft.) _____ (including garage, finished basement/attics, decks or porch)
 Gross living area (sq. ft.) _____ Habitable room count _____
 Number of fireplaces _____ Number of bedrooms _____
 Number of bathrooms _____ Number of half/baths _____
 Type of heating system _____ Number of decks/ porches _____
 Type of cooling system _____ Enclosed _____ Open _____

3. "Total Project Square Footage" may be substituted for "Total Project Cost"

**TOWN OF GRANBY
RESIDENTIAL POOL REGISTRATION**

Name: _____

Date: _____

Address: _____

Phone: _____

Contractor: _____

Phone: _____

Contractor Address: _____

- Above Ground Pool In-Ground Pool Town Sewer Septic System


If your home is served by a **SEPTIC TANK LEACHING SYSTEM**, you must meet the following conditions:

In-ground Pools: Must be at least 10' (ten feet) from the septic tank and 20' (twenty feet) from the leaching facility. A sanitarian or an engineer must be hired to submit measurements of the disposal system and proposed pool placement to the **HEALTH DEPARTMENT**.

Above Ground Pools: Shall not be located over a septic tank in a position that prevents servicing and cleaning.

BACK FLOW PREVENTOR: No pool will be approved unless a back flow preventor service is installed at the source of the water supply. This is usually where the hose is connected.

**BACK-SIPHONAGE BACKFLOW PREVENTOR
FOR HOSE BIBB INSTALLATIONS**

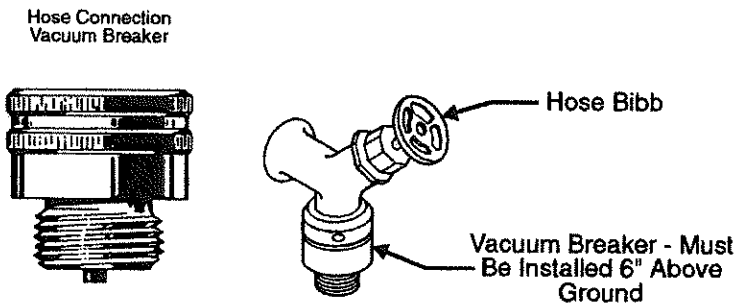

Homeowners commonly use garden hoses connected to the municipal water supply for a variety of purposes, including irrigation of lawns and flower beds, washing cars, filling swimming pools, bathing pets, applying liquid fertilizers and applying pesticides. Often hose-end sprayers are used, directly connecting reservoirs of chemicals to the garden hose. In each of these cases, the potential exists for backflow of polluted or contaminated water to the municipal water supply, possibly causing a health hazard. Hose connection vacuum breakers are simple, low-cost devices that should be used to help prevent backflow of water and possible pollutants or contaminants to the water supply.

Hose bibbs or faucets that are connected to a municipal water supply or other drinking water supply should be equipped with hose connection vacuum breakers to prevent water in the hose from moving back into the water supply. Backward movement of water is called backflow, and it can occur either by siphoning or back pressure. Backflow can occur due to back pressure if the pressure in a garden hose exceeds that in the supply pipeline. This can occur if pumps such as chemical injectors are connected to the garden hose.

APPROVED BY: _____

TITLE: _____

SWIMMING POOL REGULATIONS
Per 780 CMR MASSACHUSETTS STATE BUILDING CODE 8th EDITION
Effective 08/04/2011

Section AG101 – AG108
Swimming Pools, Spas and Hot Tubs
(containing 24" of water or more)

An outdoor private swimming pool (in-ground, above-ground, on-ground, hot tub or spa) containing more than 24 inches of water shall be provided with a protective barrier, which shall comply with the following:

FENCES:

1. The top of the barrier shall be at least 48 inches above finished ground level (side opposite the pool)
2. 2 inch space between the barrier and ground (side opposite the pool)
3. 4 inch space between the top of the pool and barrier (maximum)
4. A 4 inch sphere cannot pass through any openings in the barrier
5. Maximum mesh size for chain link fences shall be 2 ¼ inch square unless the fence has slats fastened at the top or the bottom which reduce the openings to not more than 1 ¾ inches.
6. Fencing consisting of diagonal members, such as lattice fence, the maximum opening formed by the diagonal members shall not be more than 1 ¾ inches.

GATES:

1. Must be self closing
2. Must be self latching
3. Must open outwards, away from the pool
4. Must accommodate a lock
5. 54 inch minimum for a self-latching release mechanism **OR**;
6. If the release mechanism of the self-latching device is less than 54 inches from the bottom of the gate, then:
 - (a) it shall be located on the pool side of the gate at least 3 inches below the top of the gate; and
 - (b) the gate and barrier shall not have an opening of greater than ½ inch within 18 inches of the release mechanism

THE HOUSE AS PART OF THE BARRIER:

Where a wall of a dwelling serves as part of the pool barrier, one of the following conditions must be met:

1. The pool shall be equipped with a power safety cover in compliance with ASTM F 1346 **OR**;
2. Doors with direct access to the pool through that wall shall be equipped with an alarm that produces an audible warning when the door and/or its screen are opened. The alarm shall be listed and labeled in accordance with UL 2017. The deactivation switches shall be located a minimum of 54 inches above the threshold of the door.

ABOVE GROUND POOL AS PART OF THE BARRIER

Where an above ground pool is used as part of the barrier (the pool is 48 inches above grade all the way around the pool) or where the barrier is mounted to the top of the pool:

1. A retractable, lockable ladder that cannot be removed and retracts by hinge or sliding mechanism to 48 inches or more above the finished grade level and has provision for securing in the retracted mode with a locking device shall be considered an acceptable alternative. **OR**
2. The ladder area shall be surrounded by a barrier which meets the requirements listed for fences and gates (i.e. the barrier must be a minimum of 48 inches high, must have a gate that is self closing and self latching, ect.)

I, as the homeowner, have read and agree to comply with the above fence requirements necessary for final inspection as well as occupancy of the newly installed pool.

Name: _____

Date: _____

Signature: _____

Address: _____

421.9 Enclosures for *outdoor, inground public and semi-public* swimming pools: *Outdoor, inground public semi-public* swimming pools shall be provided with an enclosure in accordance with M.G.L. c. 140, § 206.

421.9.1 Enclosure for *public and semi-public outdoor, inground swimming pools*: Every *public and semi-public outdoor, inground swimming pool* shall be enclosed by a fence six feet in height and firmly secured at ground level provided that any board or stockade fence or structure shall be at least five feet in height, but if over five feet in height, the fence shall be chain link. Such enclosure, including gates therein, shall not be less than six feet above the ground, and any gate shall be self-latching with latches placed four feet above the ground or otherwise made inaccessible from the outside to children up to eight years of age. Such enclosure shall be constructed of such material and maintained so as not to permit any opening in said enclosure, other than a gate, wider than three inches at any point along the enclosure. Any such pool shall be equipped with at least one life ring and rescue hook.

421.9.1.1 Enclosure for all other *public and semi-public swimming pools*: The enclosure shall extend not less than four feet (1219 mm) above the ground. All gates shall be self-closing and self-latching with latches placed at least four feet (1219 mm) above the ground.

421.9.2 Construction of enclosure for all other *public and semi-public swimming pools*: Enclosure fences shall be constructed so as to prohibit the passage of a sphere larger than four inches (102 mm) in diameter through any opening or under the fence. Fences shall be designed to withstand a horizontal concentrated load of 200 pounds (91 kg) applied on a one-square-foot (0.093 m²) area at any point of the fence.

421.9.3 Alternative devices: A natural barrier, pool cover or other protective device approved by the governing body shall be an acceptable enclosure as long as the degree of protection afforded by the substituted device or structure is not less than the protection afforded by the enclosure, gate and latch described herein.

421.10 Enclosures for private swimming pools, spas and hot tubs: *In lieu of any zoning laws or ordinances to the contrary*, private swimming pools, spas and hot tubs shall be enclosed in accordance with 780 CMR 421.10.1 through 421.10.4 or by other approved barriers.

421.10.1 Outdoor private swimming pool: An outdoor private swimming pool, including an inground, aboveground or on-ground pool, hot tub

or spa shall be provided with a barrier which shall comply with the following.

1. The top of the barrier shall be at least 48 inches (1219 mm) above finished ground level measured on the side of the barrier which faces away from the swimming pool. The maximum vertical clearance between finished ground level and the barrier shall be two inches (51 mm) measured on the side of the barrier which faces away from the swimming pool. Where the top of the pool structure is above finished ground level, such as an above-ground pool, the barrier shall be at finished ground level, such as the pool structure, or shall be mounted on top of the pool structure. Where the barrier is mounted on top of the pool structure, the maximum vertical clearance between the top of the pool structure and the bottom of the barrier shall be four inches (102 mm).
2. Openings in the barrier shall not allow passage of a four-inch (102 mm) diameter sphere.
3. Solid barriers shall not contain indentations or protrusions except for normal construction tolerances and tooled masonry joints.
4. Where the barrier is composed of horizontal and vertical members and the distance between the tops of the horizontal members is less than 45 inches (1143 mm), the horizontal members shall be located on the swimming pool side of the fence. Spacing between vertical members shall not exceed 1¼ inches (44 mm) in width. Decorative cutouts shall not exceed 1¼ inches (44 mm) in width.
5. Where the barrier is composed of horizontal and vertical members and the distance between the tops of the horizontal members is 45 inches (1143 mm) or more, spacing between vertical members shall not exceed four inches (102 mm). Decorative cutouts shall not exceed 1¼ inches (44 mm) in width.
6. Maximum mesh size for chain link fences shall be a 1¼-inch (32 mm) square unless the fence is provided with slats fastened at the top or the bottom which reduce the openings to not more than 1¼-inches (44 mm).
7. Where the barrier is composed of diagonal members, such as a lattice fence, the maximum opening formed by the diagonal members shall be not more than 1¼ inches (44 mm).
8. Access gates shall comply with the requirements of 780 CMR 421.10.1 items 1 through 7, and shall be equipped to accommodate a locking device. Pedestrian access gates shall open outwards away from the pool and shall be self-closing and have a self-latching device. Gates other than pedestrian access gates shall have a self-latching device. Where the release mechanism of the self-latching device is located less than

54 inches (1372 mm) from the bottom of the gate: (a) the release mechanism shall be located on the pool side of the gate at least three inches (76 mm) below the top of the gate; and (b) the gate and barrier shall not have an opening greater than 1/2 inch (13 mm) within 18 inches (457 mm) of the release mechanism.

9. Where a wall of a dwelling serves as part of the barrier, one of the following shall apply:

9.1. All doors with direct access to the pool through that wall shall be equipped with an alarm which produces an audible warning when the door and its screen, if present, are opened. The alarm shall sound continuously for a minimum of 30 seconds immediately after the door is opened. The alarm shall have a minimum sound pressure rating of 85 dBA at ten feet (3048 mm) and the sound of the alarm shall be distinctive from other household sounds such as smoke alarms, telephones and door bells. The alarm shall automatically reset under all conditions. The alarm shall be equipped with manual means, such as touchpads or switches, to deactivate temporarily the alarm for a single opening from either direction. Such deactivation shall last for not more than 15 seconds. The deactivation touchpads or switches shall be located at least 54 inches (1372 mm) above the threshold of the door.

9.2. The pool shall be equipped with an approved power safety cover.

10. Where an above-ground pool structure is used as a barrier or where the barrier is mounted on top of the pool structure, and the means of access is a fixed or removable ladder or steps, the ladder or steps shall be surrounded by a barrier which meets the requirements of 780 CMR 421.10.1 items 1 through 9. A removable ladder shall not constitute an acceptable alternative to enclosure requirements.

421.10.2 Indoor private swimming pool: All walls surrounding an indoor private swimming pool shall comply with 780 CMR 421.10.1, item 9.

421.10.3 Prohibited locations: Barriers shall be located so as to prohibit permanent structures, equipment or similar objects from being used to climb the barriers.

421.10.4 Exemptions: The following shall be exempt from the provisions of 780 CMR 421.0.

1. A spa or hot tub with an approved safety cover.
2. Fixtures which are drained after each use.

421.11 Diving boards: Minimum water depths and distances for diving hoppers for pools, based on board height above water, shall comply with Table

421.11(1) for public pools and Table 421.11 (2) for private pools.

The maximum slope permitted between point D₂ and the transition point shall not exceed one unit vertical to three units horizontal (1:3) in private and public pools. D₁ is the point directly under the end of the diving boards. D₂ is the point at which the floor begins to slope upwards to the transition point. See Figure 421.11.

Figure 421.11
MINIMUM WATER DEPTHS AND DISTANCES BASED ON BOARD HEIGHT FOR ALL PUBLIC, SEMI PUBLIC AND PRIVATE POOLS

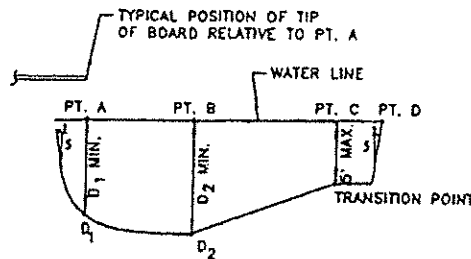


Table 421.1 1(1)
MINIMUM WATER DEPTHS AND DISTANCES BASED ON BOARD HEIGHT FOR ALL PUBLIC POOLS

Board height	Minimum depth ^a at D ₁ directly under end of board	Distance ^a between D ₁ and D ₂	Minimum depth ^a at D ₂
2'2" (3/4 meter)	7'0"	8'0"	8'6"
2'6" (3/4 meter)	7'6"	9'0"	9'0"
1 meter	8'6"	10'0"	10'0"
3 meter	11'0"	10'0"	12'0"

Note a. 1 foot = 304.8 mm.

Table 421.11(2)
MINIMUM WATER DEPTHS AND DISTANCES BASED ON BOARD HEIGHT FOR PRIVATE POOLS

Board height	Minimum depth ^a at D ₁ directly under end of board	Distance ^a between D ₁ and D ₂	Minimum depth ^a at D ₂
1'8" (1/2 meter)	6'0"	7'0"	7'6"
2'2" (3/4 meter)	6'10"	7'6"	8'0"
2'6" (3/4 meter)	7'5"	8'0"	8'0"
3'4" (1 meter)	8'6"	9'0"	9'0"

Note a. 1 foot = 304.8 mm.

780 CMR 422.0 EXISTING BUILDINGS

422.1 Existing Buildings: See 780 CMR 34.

422.2 Places of assembly

422.2.1 Change of use: An existing building or structure or part thereof shall not be altered or



Town of Granby Building Department

Gregory Briggs
Building Inspector
Zoning Code Officer
10B West State Street
Granby, MA 01033

Phone: (413) 467-7179 Fax: (413) 467-2080

Barrier Code Compliance Affidavit

Pool is being installed by: _____

Address for new pool; _____

Property Owner's Name: _____

PLEASE INITIAL APPROPRIATE ITEMS BELOW

We have been made aware of, and will meet, the pool barrier requirements

_____ We will meet the pool barrier requirements by using one of the following barrier alternatives

_____ There will be a minimum 4' high fence with self-closing/self-latching gates, with gate latch operating mechanism minimum 54" above grade, between the pool and the residence.

_____ There will be a fence with gates as above between adjacent properties and WE will be using the residence wall as a barrier and will meet all safety requirements for doors and windows in the residence walls.

_____ There will be a fence with gates as above between the pool and the adjacent properties and there will be a key-operated, motorized safety cover on the pool, which complies with ASTM F-1346

_____ WE have been made aware that we will not be able to have a "pre-Plaster" Building Safety inspection (i.e. The inspection that would allow the filling of the pool with water) until all pool barriers are in place and all Zoning Ordinance requirements and Building Safety Code requirements have been met.

_____ WE agree to erect a temporary fence around the pool area immediately after excavation

Signature of Property Owners(s) _____ Date: _____

_____ Date: _____

Signature of Pool Contractor or Agent _____ Date: _____

PLOT PLAN



DATE: _____

HOUSE NUMBER _____

LOT NUMBER _____

OWNER OF LAND _____


ZONE _____

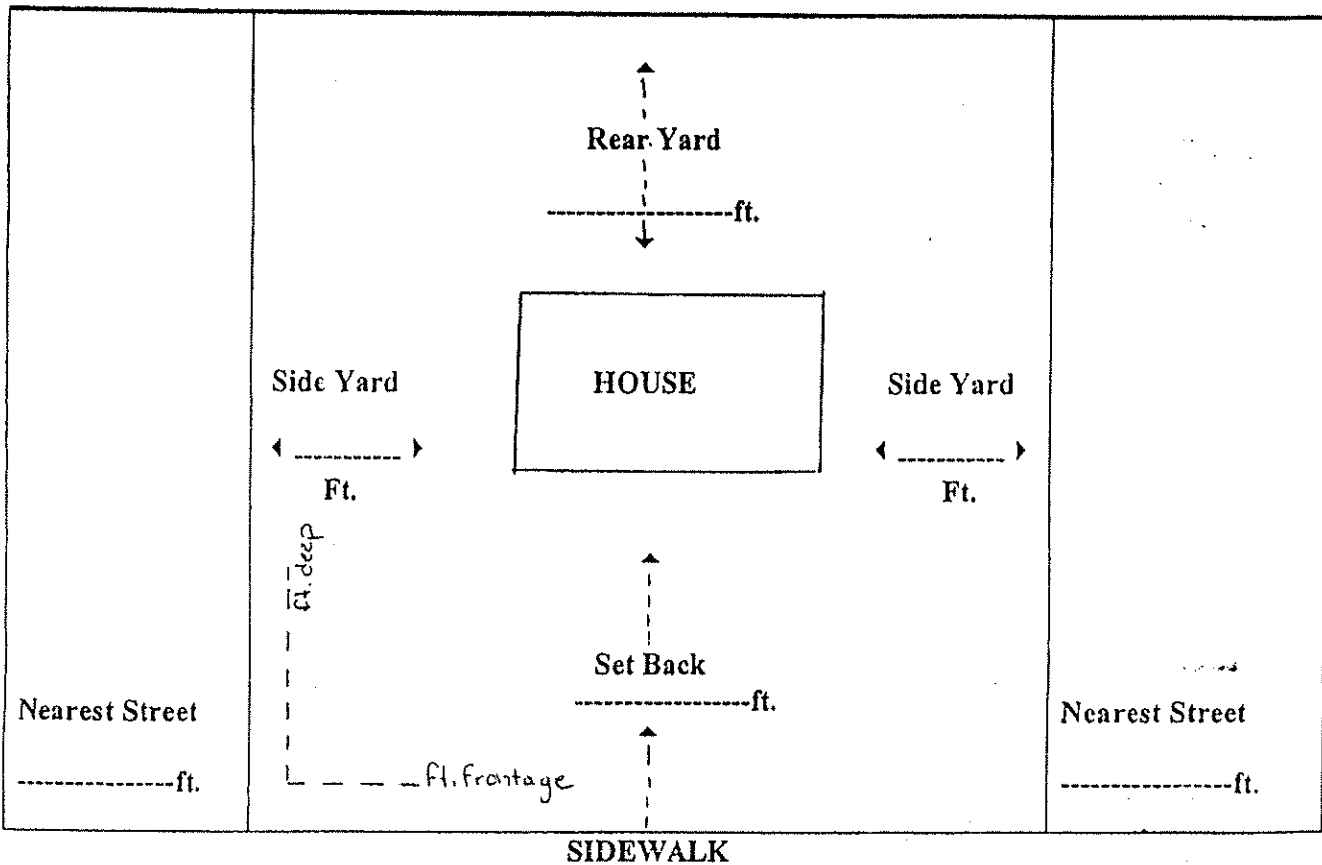

Mark North Point

Street/Avenue/Road

Signature _____



The Commonwealth of Massachusetts
 Department of Industrial Accidents
 1 Congress Street, Suite 100
 Boston, MA 02114-2017
 www.mass.gov/dia

Workers' Compensation Insurance Affidavit: Builders/Contractors/Electricians/Plumbers.
 TO BE FILED WITH THE PERMITTING AUTHORITY.

Applicant Information

Please Print Legibly

Name (Business/Organization/Individual): _____

Address: _____

City/State/Zip: _____ Phone #: _____

Are you an employer? Check the appropriate box:

- 1. I am an employer with _____ employees (full and/or part-time).*
- 2. I am a sole proprietor or partnership and have no employees working for me in any capacity. [No workers' comp. insurance required.]
- 3. I am a homeowner doing all work myself. [No workers' comp. insurance required.] †
- 4. I am a homeowner and will be hiring contractors to conduct all work on my property. I will ensure that all contractors either have workers' compensation insurance or are sole proprietors with no employees.
- 5. I am a general contractor and I have hired the sub-contractors listed on the attached sheet. These sub-contractors have employees and have workers' comp. insurance ‡
- 6. We are a corporation and its officers have exercised their right of exemption per MGL c. 152, §1(4), and we have no employees. [No workers' comp. insurance required.]

Type of project (required):

- 7. New construction
- 8. Remodeling
- 9. Demolition
- 10. Building addition
- 11. Electrical repairs or additions
- 12. Plumbing repairs or additions
- 13. Roof repairs
- 14. Other _____

* Any applicant that checks box #1 must also fill out the section below showing their workers' compensation policy information.

† Homeowners who submit this affidavit indicating they are doing all work and then hire outside contractors must submit a new affidavit indicating such.

‡ Contractors that check this box must attached an additional sheet showing the name of the sub-contractors and state whether or not those entities have employees. If the sub-contractors have employees, they must provide their workers' comp. policy number.

I am an employer that is providing workers' compensation insurance for my employees. Below is the policy and job site information.

Insurance Company Name: _____

Policy # or Self-ins. Lic. #: _____ Expiration Date: _____

Job Site Address: _____ City/State/Zip: _____

Attach a copy of the workers' compensation policy declaration page (showing the policy number and expiration date).

Failure to secure coverage as required under MGL c. 152, §25A is a criminal violation punishable by a fine up to \$1,500.00 and/or one-year imprisonment, as well as civil penalties in the form of a STOP WORK ORDER and a fine of up to \$250.00 a day against the violator. A copy of this statement may be forwarded to the Office of Investigations of the DIA for insurance coverage verification.

I do hereby certify under the pains and penalties of perjury that the information provided above is true and correct.

Signature: _____ Date: _____

Phone #: _____

Official use only. Do not write in this area, to be completed by city or town official.

City or Town: _____ Permit/License # _____

Issuing Authority (circle one):

- 1. Board of Health 2. Building Department 3. City/Town Clerk 4. Electrical Inspector 5. Plumbing Inspector
- 6. Other _____

Contact Person: _____ Phone #: _____

HOMEOWNER LICENSE EXEMPTION

JOB LOCATION: _____

STREET ADDRESS

HOMEOWNER: _____

NAME

HOME PHONE

WORK PHONE

CURRENT MAILING ADDRESS: _____

CITY/TOWN

STATE

ZIP CODE

Massachusetts Amendments to the International Building Code

Eighth Edition Section 110.R5.3.1 (formally 780 CMR 108.3.5)

110.R5.1.3.1: Individuals supervising persons engaged in construction, reconstruction, alteration, repair, removal or demolition involving any activity regulated by any provision of 780 CMR, shall be licensed in accordance with 780 CMR 110.R5. Individuals engaged in the supervision of the field erection of manufactured buildings in accordance with 780 CMR 110.R3, shall be licensed as construction supervisors.

Exception: Any homeowner performing work for which a building permit is required shall be exempt from the licensing provisions of 780 CMR 110.R5, providing that if a homeowner engages a person(s) for hire to do such work, then such homeowner shall act as supervisor. This exception shall not apply to the field erection of a manufactured buildings constructed pursuant to 780 CMR 110.R3.

Note: Any licensed construction supervisor who contracts to do work for a homeowner shall be responsible for performing said work in accordance with 780 CMR and manufacture's recommendations, as applicable, whether or not the licensed contractor secured the permit for said work.

Definition of a homeowner: For the purpose of 780 CMR The Massachusetts Amendments to the International Building Code Eighth Edition, a **homeowner** is defined as follows: Person(s) who owns a parcel of land on which he/she resides or intends to reside, on which there is, or intends to be, a one or two family dwelling, attached or detached structures accessory to such use and/or farm structures. A person who constructs more than one home in a two year period shall not be considered a homeowner.

The undersigned **homeowner** assumes responsibility for compliance with the Massachusetts State Building Code Eighth Edition and other applicable codes, by-laws, rules and regulations AND certifies that he/she understands the Town of Granby Building Department's minimum inspection procedures and requirements and that he/she will comply with said procedures and requirements.

Homeowner's Signature: _____

Building Inspector Approval: _____

Note: Three family dwellings 35,000 cubic feet or larger, will be required to comply with the State Building Code Section 116.1 – Construction Control.



Town of Granby, Massachusetts

Building Department

10B West State Street - Granby, MA 01033

Tel: (413) 467-7179 Fax: (413) 467-2080

www.granby-ma.gov

Carissa M. Lisee
Building Commissioner

Date: _____

Address: _____

Construction Type: _____

Permit Number: _____

Map/Parcel: _____

Zoning: _____

Sanitary Disposal System	Y	N
Well Permit	Y	N
Well Drilling Report	Y	N
Water Test	Y	N
3 Sets Building Plans	Y	N
Copy of Deed	Y	N
Marked Smoke Detectors	Y	N
Construction Supervisor's License	Y	N
Home Improvement Registration	Y	N
Homeowner Exemption	Y	N
Workmen's Comp Affidavit	Y	N

Permit Fee Paid	Y	N
Taxes Paid	Y	N
Plot Plan	Y	N
As-Built Needed	Y	N
Demo Debris	Y	N
Building in Flood Plain	Y	N
Building in Wetlands	Y	N
Located on Scenic Road	Y	N
Stone Walls	Y	N
Building in Water Supply District	Y	N
Energy Audit	Y	N

Board of Health	
Well:	_____
Septic:	_____
Fire Chief:	
Planning Board:	
Highway Supervisor:	

Sewer Commissioner:
Chief of Police:
Historical Commission:
Conservation Commission:
Tree Warden:

NOTE: A Building permit will NOT be issued unless this form is filled out properly and signatures for checked boxes have been obtained.

Building Commissioner/Zoning Enforcement Officer

**TOWN OF GRANBY
BUILDING DEPARTMENT**

**REQUEST TO COLLECTOR'S OFFICE
FOR VERIFICATION OF PAYMENTS**

PROPERTY LOCATION: _____

PARCEL ID: _____

OWNER'S NAME: _____

PLEASE CHECK ONE:

BUILDING SIGN PERMIT ELECTRICAL PLUMBING

PERSON REQUESTING PERMIT:


NAME: _____

ADDRESS: _____

COLLECTOR'S OFFICE ENTRY

REMARKS: _____

REPORTED BY: _____ **DATE:** _____



Russell A. Ducharme, Jr.
Inspector of Buildings

TOWN OF GRANBY

Building Inspector

10B West State Street

Granby, MA 01033

(413) 467-717 Tel.

(413) 467-2080 Fax

Construction Debris Affidavit

(for all demolition and renovation work)

In accordance with the provisions of MGL c40, S54, a condition of Building Permit Number _____ is that the debris resulting from this work shall be disposed of in a properly licensed waste disposal facility as defined by MGL c 111, S150A.

The debris will be disposed of in:

LOCATION OF FACILITY

The debris will be transported by:

NAME OF HAULER

SIGNATURE OF APPLICANT

DATE